



泵

高品质高性价比

安德里茨标准立式泵

安德里茨VTP系列标准立式泵，实现了多种标准化设计及材料配置，优化了维护便利性，并可根据客户需求定制。例如，

在DN300 ~DN800 的范围内VTP系列一共有38个型号。VTP属于多级结构设计（1~3级），耐磨环可以选用高分子聚合

物或者不锈钢材料。如果轴向推力轴承需要冷却，可选择水冷或风冷方式。

ANDRITZ

ENGINEERED SUCCESS

安德里茨标准立式泵




安德里茨标准立式泵最大的优势之一，是模块化设计及其所体现出的效率。该泵由独立的标准模块构成，必要时可轻松更换。除此之外，VTP 具有寿命长和维修率低的特性，另一个关键优势是其

灵活的出口弯管位置选择，根据应用和工厂布局，出口弯管可布置在基础上或者基础下。

- 应用领域：**
- 电厂冷却循环水泵
 - 海水淡化取水泵
 - 排灌工程输水泵
 - 市政、工业供水送水泵
 - 电厂烟气脱硫泵

- 产品优势：**
- 效率：高达91%
 - 级数：1~3级可选
 - 密封：填料密封、集装式密封、剖分式密封（可选）
 - 扬程：高达170m
 - 流量：高达 8640 m³/h
 - 功率：26 kW ~ 975 kW

	河水/市政污水	工业废水	海水/工业废水	海水
导叶体	5.3106	1.4474	1.4474	1.4469
叶轮	1.4317 / 1.4408	1.4474	1.4474	1.4469
泵轴	1.4021	1.4462	1.4462	1.4410
筒体, 出口弯管	1.0038	1.4404	1.4462	1.4410
电机座	1.0038	1.0038	1.0038	1.0038

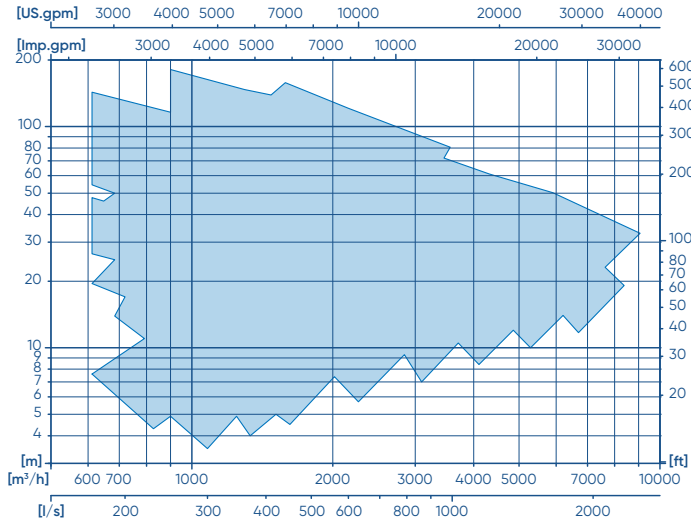

CONTACT

ANDRITZ AG
 p: +43 316 6902-2509
 pumps@andritz.com

ANDRITZ.COM/PUMPS



All data, information, statements, photographs and graphic illustrations in this leaflet are without any obligation and raise no liabilities to or form part of any sales contracts of ANDRITZ AG or any affiliates for equipment and/or systems referred to herein. © ANDRITZ AG 2021. All rights reserved. No part of this copyrighted work may be reproduced, modified or distributed in any form or by any means, or stored in any database or retrieval system, without the prior written permission of ANDRITZ AG or its affiliates. Any such unauthorized use for any purpose is a violation of the relevant copyright laws. ANDRITZ AG, Stattegger Strasse 18, 8045 Graz, Austria.

